



## NOUVEAU 2 FITTING INSTRUCTIONS GUIDE



### NOUVEAU 2

Assemble the units in order according to the diagrams.

Note the direction of flow arrow.

The mains water enters the CARBON FILTER in vessel 1 and the treated water leaves from the ION-EXCHANGE FILTER from vessel 3. The treated water can be drunk all around the property. You do NOT NEED a dedicated drinking pipe to the kitchen sink.


Check all brass to plastic joints to ensure proper seal. PTFE tape or LS-X type thread sealant can be used (note some units are pre-assembled).

Mount the filter assembly in a suitable location after the stopcock and fit connect to the incoming water main.

**DO NOT USE COPPER PIPEWORK.** Ideally also fit a non-copper bypass loop and isolation valves for servicing. Ensure filter is mounted vertically with clearance for the bowl from each filter to be dropped when changing a cartridge (in the case of the larger unit, a hole can be cut in the bottom of a kitchen base unit to allow for height). The NOUVEAU2 can be placed on a flat surface if mounting via the bracket is not possible.

**Always use plastic pipe work in near vicinity of the filter, recommended distance of plastic pipe is a 1-meter run either side (if the unit is to be fitted adjacent to the stop cock then a small length of plastic pipe **MUST** be fitted between the brass fitting on the stop cock and the NOUVEAU unit)**

Units are supplied with  $\frac{3}{4}$  "bsp inlets. Remember to take note of filter sequence and flow direction. (as shown by Arrow below)

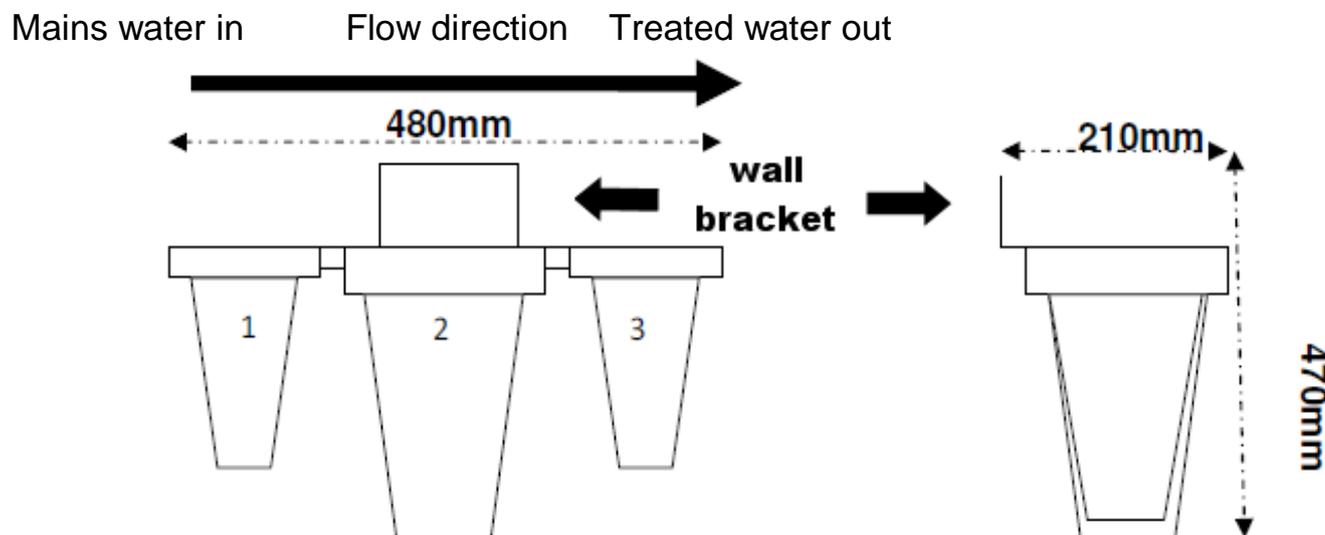

#### **Fitting Kit NOUVEAU 2**

(Qty 2) 22mm- $\frac{3}{4}$  BSP Push fit Pipe Connections

Qty (2)  $\frac{3}{4}$ - $\frac{3}{4}$  BSP Male Nipple connection

Qty (1) Mounting Bracket + Screws

Qty (2) Filter Spanners (Large & Small Filter Housing)

Qty (1) Fitting Instructions



#### **CARTRIDGE CHANGES**

The carbon filter (1) is changed every 12- months.

The main filter (2) is changed every 3- years.

The ion exchange cartridge (3) is changed every 3- months dependant on water quality and hardness in your area.

**Note: these periods are for average water usage and water hardness.**

**TESTING: Once installed run the cold tap for a few minutes to flush out loose media and test for leaks.**

SPLENDID PRODUCTS LIMITED  
WYTHE COTTAGE, CHURCH STREET  
EAST HENDRED OX12 8LA  
UNITED KINGDON  
Tel: +44 1235 862540  
Fax +44 1235862541  
olympia@littleplumber.com

